


5-7t


Configuration	Overhead Guard	Roof Weather Canopy	Pedal Rubber	Semi-suspension Seat	Automatic Shift
	Warning Light	Wide view mast(2 Stage)	Backrest	Standard Forks	Multi Function Display
	Working Hour Meter	Oil Content Meter	Water-thermometer	Charging Indicator	Neutral Position Switch
	Power Master Switch	Fuel Cap with Lock	Oil Pressure Warning	Electric Horn	Full Set of LED Lights
	Reversing Buzzer	Key Shutoff Device	Tilt-adjustable Steering Column	Lift, Tilt, Levers	Two-piece Multiplex Valve
	Fully-hydraulic Power Steering	Tilting Cylinder Latching Valve	Transmission Oil Filter	Torque Converter Oil Dipstick	Push-button Parking Brake
	Traction Pin	Tool Box	Balanced Weight Heat Sink Protective Cover		

Optional	Solid Tyres	Cabin	Electric Fan	Suspension Seat	Heater
	Front Windscreen	Rear Working Light	High Level Exhaust	Double Air Filter	Oil Bath Air Filter
	Driving OPS	Full Set OPS(Including drive and lift)	Torque Converter Oil Temperature Alarm	Reversing Voice Horn	Overspeed Alarm,10km/h
	Sound-light Alarm	Cold A/C	Fire Extinguishing Muffler	Widen Fork Carriage	Fork Extensions
	Tilt cylinder protection	Steering cylinder protection	Custom Colours	Multiple Hydraulic Attachments	

Load Curve

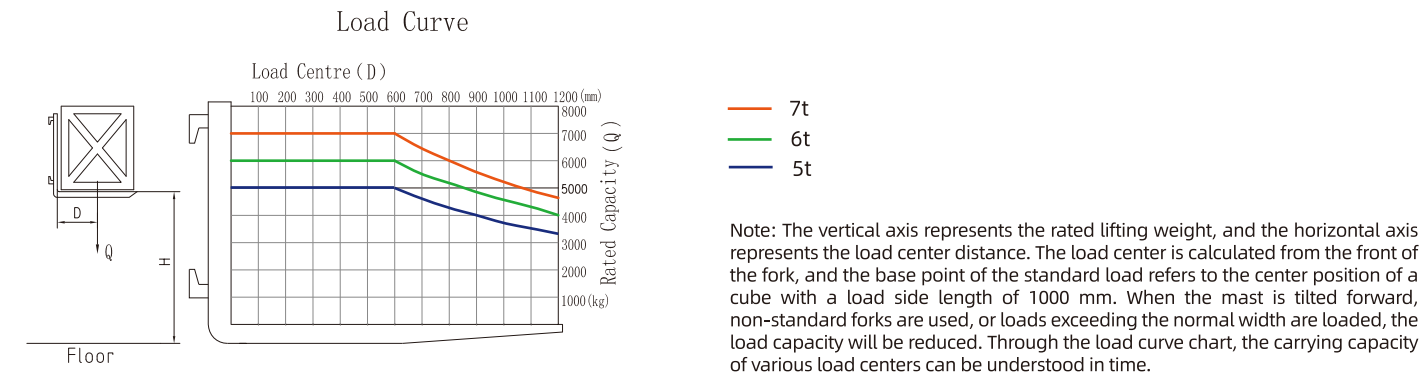

Structure Diagram

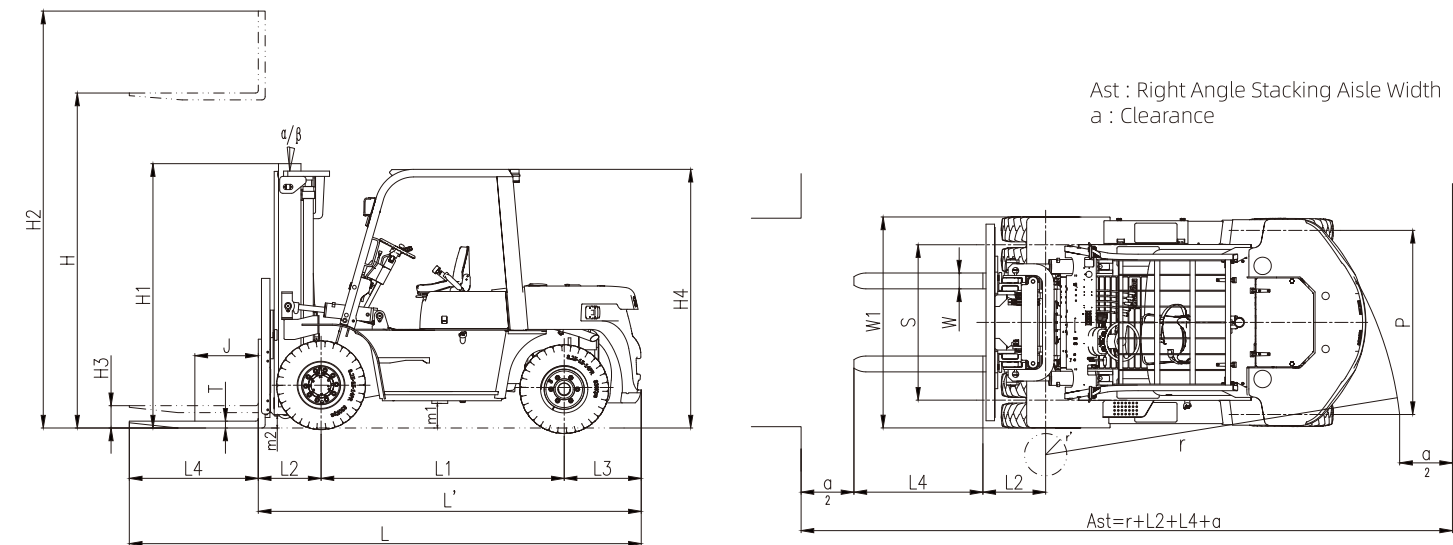

SINOMACH

SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.



5-7t

CPC50L/CPC60L/CPC70L



SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

[Http://www.sinomachhiglobal.com](http://www.sinomachhiglobal.com)

E-mail:sales@changlin.com.cn service@changlin.com.cn

V.24071



国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO.,LTD.

Good Heat Dissipation

Cooling system is reasonable optimizaed, which improves cooling performance significantly.Thus improving reliability and durability of key components such as gearbox and engine.

Lowering Energy Consumption

Optimized design of load sensing hydraulic system reduces vehicle fuel consumption Effectively.

Operating comfort

Adopted interactive ergonomic design to improve operating comfort. Equipped with wide field of view mast to improve driver's field of view.

Intelligent Reversing

The electronic reversing system is convenient and labor-saving to operate; the new intelligent shifting system is upgraded to prevent starting in second gear and ensure the reliability of the gearbox.

Convenient Maintenance

Interior space of car body is more spacious Parts Positions are more reasonable. Opening angle of hood is increased to 80°.

High Reliability

Strength of the core structural parts of car body, mast and hood has been enhanced greatly to make whole vehicle more solid.

Product details and advantages



Wide-view mast improves safety in stacking operations.




Using high-pressure common rail engine (CHN IV), Bosch high-pressure multiple injection technology, power performance is significantly improved, and the smoke emission is lower.



Integrated electric control box is waterproof and dustproof for easy maintenance.



The hood opening angle is increased to 80°, making maintenance more convenient.

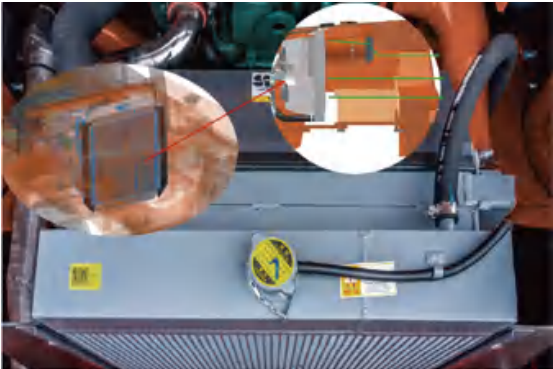

The whole machine has a large internal space, reasonable layout of parts, good heat dissipation performance and higher efficiency.

Overall Specifications

5-7t

Character						
1.01	Manufacturer			SINOMACH		
1.02	Model			CPC50L	CPC60L	CPC70L
1.03	Power type			Diesel		
1.04	Rated capacity	Q	kg	5000	6000	7000
1.05	Load center	J	mm	600		
Dimensions						
2.01	Max. height (with backrest)	H2	mm	4430	4430	4430
2.02	STD Max lifing height	H	mm	3000	3000	3000
2.03	Overhead guare height	H4	mm	2450	2450	2450
2.04	Overall length (with fork)	L	mm	4715	4790	4840/4970(optional YUCHAI Euro V)
2.05	Wheelbase	L1	mm	2300	2300	2300/2430(optional YUCHAI Euro V)
2.06	Front overhang	L2	mm	595	595	600
2.07	Rear overhang	L3	mm	595	595	600
2.08	Min ground clearance (Chassis/Mast)	m1/m2	mm	230/200	230/200	230/200
2.09	Overall width (outside)	W1	mm	1995	1995	1995
2.10	Fork adjustment range		mm	300-1835	300-1835	300-1835
2.11	Fork size(STD)		mm	1220×150×60		1220×150×65
2.12	Front wheel tread	S	mm	1470	1470	1470
2.13	Rear wheel tread	P	mm	1700	1700	1700
2.14	Min tuming radius(outside)	r	mm	3240	3300	3370/3500(optional YUCHAI Euro V)
2.15	Min aisle width for pallet 1000x1200,crossways	Ast	mm	5230	5315	5390/5520(optional YUCHAI Euro V)
2.16	Min aisle width for pallet 800x1200.lengthways	Ast	mm	5230	5315	5390/5520(optional YUCHAI Euro V)
Tyres						
3.01	Capital W (F/R, X=Driven wheels)			X=4/2		
3.02	Tyres type (F/R)			Pneumatic		
3.03	Tyres size,front			8.25-15-14PR		
3.04	Tyres size,rear			8.25-15-14PR		
Performance and other details						
4.01	Max. travelling speed,loaded/unloaded		km/h	24/29	24/29	24/29
4.02	Lifting speed, loaded/unloaded		mm/s	510/530	510/530	500/530
4.03	Lowering speed,loaded/unloaded		mm/s	400/390		
4.04	Max. traction force(loaded)		KN	60	60	60
4.05	MAX. gradeability,loaded/unloaded		%	38/20	35/20	32/20
4.06	Service weight(with oil & water)		kg	8320	8940	9500
4.07	Axle load, F/R(loaded)		kg	11920/1400	13290/1650	14700/1800
4.08	Axle load, F/R(unloaded)		kg	4220/4100	4040/4900	3850/5650
4.09	Service brake			Power brake -pedal		
4.10	Parking brake			Mechanical-hand brake lever		
4.11	Transmission type			Automatic		
4.12	Gear NO.(F/R)			2/2		
4.13	Fuel tanke capacity		L	110		
4.14	Battery (voltage/capacity)		V/Ah	2×12/90		

Engine Optional

5-7t

Optional Engines							
Engine model	Displacement	Manufacturer	Rated power	Max. torque(Nm/rpm)	Bore/cylinder No./displacement	Fuel concumprion	Applicable model
CA6110/125G2	CHN II	XICHAI	85kW/2000rpm	450/1400-1500	110/6/7.127	230kg/kW.h	5-7t
CA4DF3-12GCG3U	CHN III	XICHAI	85kW/2200rpm	460/1400-1500	110/4/4.75	220kg/kW.h	5-7t
YC4A125-T300	CHN III	YUCHAI	92kW/2200rpm	480/1600-1800	108/4/4.85	/	5-7t
6BG1-NAABD-03-C2	Euro I	ISUZU	82.4kW/2000rpm	416.8/1500	105/6/6.494	232kg/kW.h	5-7t
STD-S6ST-PA1	Euro IIIA	MITSUBISHI	63.9kW/2300rpm	285/1700	94/6/3.331	/	5-7t
WP4.1G125E302	CHN III	WEICHAI	92kW/2200rpm	480/1400-1600	105/4/4.09	/	5-7t
Q5B4.5-C110-30	CHN III//Euro IIIA	DONGFENG CUMMIUS	82kW/2200rpm	480/1500	107/4/4.5	/	5-7t
YCA05115-S500	Euro V	YUCHAI	85kW/2000rpm	500/1300-1500	108/4/4.837	202kg/kW.h	7t

Mast Specifications

Mast Type	Mast Model	H2 Max Lifting Height (mm)	Load Capacity (j=600mm) (kg)			H1 Lowered Mast Height(mm)	H3 Free Lifting Height (mm)		Mast Tilting Angle (°)α/β
			CPC50L	CPC60L	CPC70L		6T	7T	
2 Stage Standard Mast-Super Wide Field	M200	2000	5000	6000	7000	2000	206	211	10/12
	M250	2500				2250			
	M270	2700				2350			
	M300	3000				2500			
	M330	3300				2650			
	M350	3500				2750			
	M375	3750				2875			
	M400	4000				3050			
	M425	4250				3175			6/6
	M450	4500				3300			
	M475	4750				3425			
	M500	5000				3550			
	M550	5500	4750	5700	6600	3850			
	M600	6000	4400	5400	6400	4100			
2 Stage Free Mast	ZM200	2000	5000	6000	7000	1960	980	985	10/12
	ZM225	2250				2085	1105	1110	
	ZM250	2500				2210	1230	1235	
	ZM270	2700				2310	1330	1335	
	ZM300	3000				2460	1480	1485	
	ZM330	3300				2610	1630	1635	
	ZM350	3500				2710	1730	1735	
	ZM370	3700				2810	1830	1835	
	ZM400	4000				3010	2030	2035	6/6
	ZM425	4250				3135	2155	2160	
	ZM450	4500				3260	2280	2285	
	Note:The free lifting height with backrest minus 402mm.								
3 Stage Free Mast	ZSM320	3200	4800	5900	6500	2205	1247	1252	10/12
	ZSM360	3600	4500	5600	6200	2335	1377	1382	
	ZSM400	4000				2465	1507	1512	
	ZSM435	4350				2585	1627	1632	
	ZSM450	4500				2635	1677	1682	
	ZSM480	4800				2735	1777	1782	6/6
	ZSM500	5000	2805	1847	1852				
	ZSM540	5400	4200	5300	6000	2990	2032	2037	
	ZSM600	6000	4000	5000	5500	3190	2232	2237	
	ZSM630	6300	3800	4600	5000	3290	2332	2337	
	ZSM650	6500	3600	4300	4500	3355	2397	2402	
	ZSM700	7000	3000	3300	3800	3545	2587	2592	
	Note:The free lifting height with backrest minus 424mm.								

Note: Load capacity is reduced 300kg with optional side shifter for 5-7t forklift.